


# TECHNICAL SPECIFICATION: PH10 TWEED Potable Water Suction & Delivery Hose

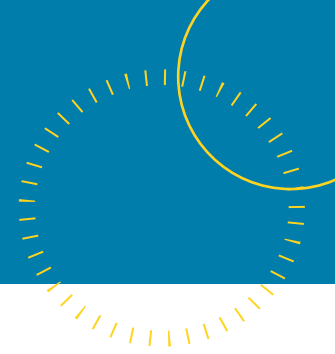

## Construction

- Tube:** White food quality EPDM
- Reinforcement:** Synthetic cord and embedded helix wire
- Cover:** Orange EPDM with yellow stripe
- Temperature Range:** -40°C to +100°C

## Typical Application:

Potable Water suction and delivery in offshore applications

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore PH10 Tweed	76	3	94	3.7	10	150	40	600	400	3.65	60
Offshore PH10 tweed	102	4	121	4.77	10	150	40	600	600	5.38	60

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



# DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO - TAP0000BJ