


# TECHNICAL SPECIFICATION:

# CH10 JURY Bulk Material Suction & Delivery Hose

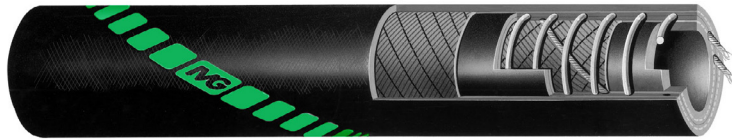

## **Construction**

- Tube:** Black SBR/NR Rubber
- Reinforcement:** Synthetic Cord embedded helix wire and copper wire
- Cover:** Black synthetic rubber with green stripe
- Temperature Range:** -40°C to +70°C

## **Typical Application:**

Cement, baryte and dry powder suction and delivery hose

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore CH10 Jury	102	4	124.5	4.91	10	150	40	600	600	5.8	120
Offshore CH10 Jury	127	5	149.5	5.89	10	150	40	600	900	6.52	60

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



## DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO - TAP00000BJ