
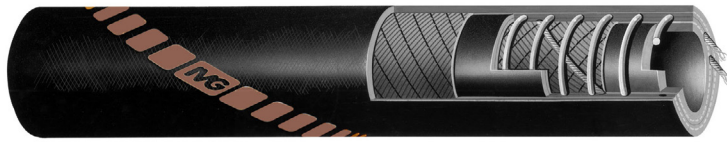


TECHNICAL SPECIFICATION: FH10 TROON Oil Suction & Delivery Hose

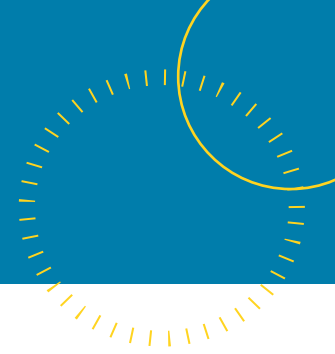

Construction

- Tube:** Black nitrile rubber
- Reinforcement:** Synthetic cord and an embedded helix wire and copper wires
- Cover:** Black synthetic rubber with brown stripe
- Temperature Range:** -30°C to +90°C

Typical Application:

Fuel Oil, Liquid Mud containing Crude Oil and Grit suction and delivery in offshore applications
Maximun aromatic content: 30%

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore FH10 Troon	76	3	94	3.7	10	150	40	600	500	3.63	120
Offshore FH10 Troon	102	4	120	4.73	10	150	40	600	600	4.95	120
Offshore FH10 Troon	127	5	150	5.91	10	150	40	600	900	7.93	60

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO - TAP00000BJ