
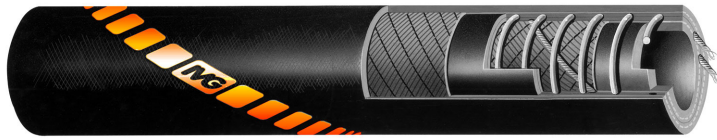


# TECHNICAL SPECIFICATION: OBAN Oil Suction & Delivery Hose

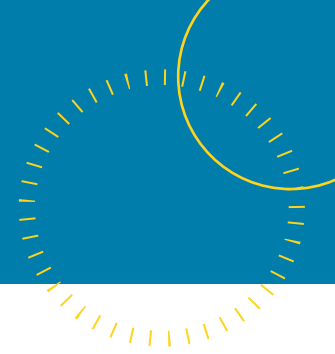

## Construction

**Tube:** Black PVC/NBR rubber

**Reinforcement:** Synthetic cord plies and an embedded helix wire and an anti-static copper wire

**Cover:** Black CR rubber with orange stripe

**Temperature Range:** -25°C to +90°C

## Typical Application:

Fuel Oil, Liquid Mud containing Crude Oil and Grit suction and delivery in offshore applications  
Maximum aromatoc content: 50%

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore Oban 20	102	4	125	4.93	20	300	60	900	560	6.4	120
Offshore Oban 20	152	6	178	7.01	20	300	60	900	910	11.6	60
Offshore Oban 20	203	8	233.5	9.20	20	300	52	780	1340	15.3	60

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



## DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO - TAP00000BJ