
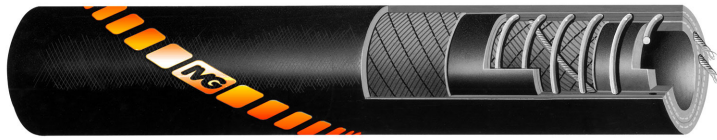


TECHNICAL SPECIFICATION: OBAN40 Oil Suction & Delivery Hose

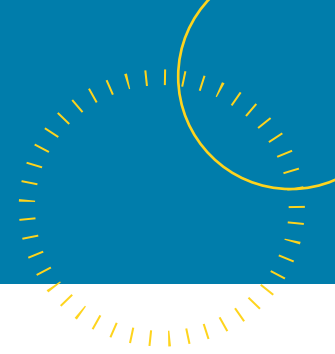

Construction

Tube: Black PVC/NBR Rubber

Reinforcement: Synthetic cord plies and an embedded helix wire and an anti-static copper wire

Cover: Black CR rubber with orange stripe

Temperature Range: -25°C to +90°C

Typical Application:

Fuel Oil, Liquid Mud containing Crude Oil and Grit suction and delivery in offshore applications
Maximum aromatic content: 50%

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore Oban 40	102	4	125	4.93	40	600	120	1300	560	6.1	120

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO - TAP00000BJ